Ammonia

NH3 3E 1000 SE

NH3 3E 1000 SE

FEATURES

Amperometric 3 electrode sensor cell Low susceptibility to abrupt changes of humidity No CO2 interference High selectivity 0 voltage biased operation

TYPICAL APPLICATIONS

Portable & fixed point applications Food industry, Semiconductor industry, Chemical Industry, General Industry

PART NUMBER INFORMATION

MINI 1854-932-30009 4 series adaptation 1854-932-30049 7 series adaptation 1854-932-30079

NH3 3E 1000 SE

TECHNICAL SPECIFICATIONS

Measuring Range 0–1000 ppm

Sensitivity Range 8 nA/ppm ± 4 nA/ppm

Zero Current at $20\,^{\circ}\text{C}$ < $\pm\,40\,\text{ nA}$ Resolution at $20\,^{\circ}\text{C}$ < 12 ppm Bias Potential $0\,\text{mV}$

Linearity < 5% full scale

Response Time at 20 ℃

t50 < 20 s calculated from 5 min. exposure time t90 < 90 s calculated from 5 min. exposure time</p>

Long Term Sensitivity Drift < 10% per 6 months

Operation Conditions

Temperature Range -20 °C to +40 °C

Humidity Range 15–90% r.H, non–condensing

Effect of Humidity no effect on zero reading

Sensor Life Expectancy > 24 months in air*


Warranty 12 months

Note:

^{*} Background concentrations of ammonia might shorten life time of sensor .


NH3 3E 1000 SE

OUTPUT vs. TEMPERATURE:

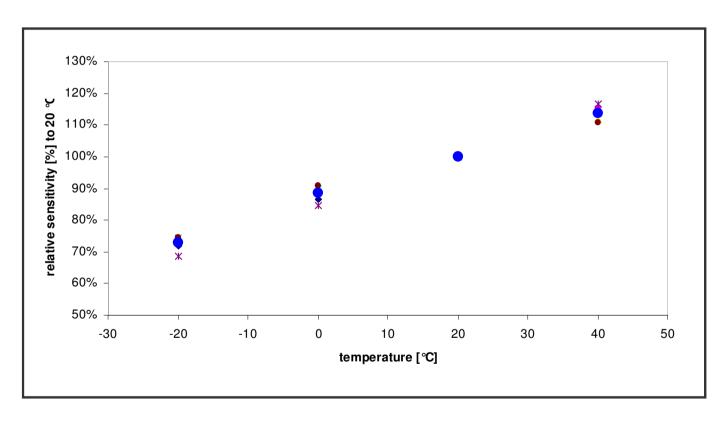

NH3 3E 1000 SE

ZERO READING vs. TEMPERATURE:

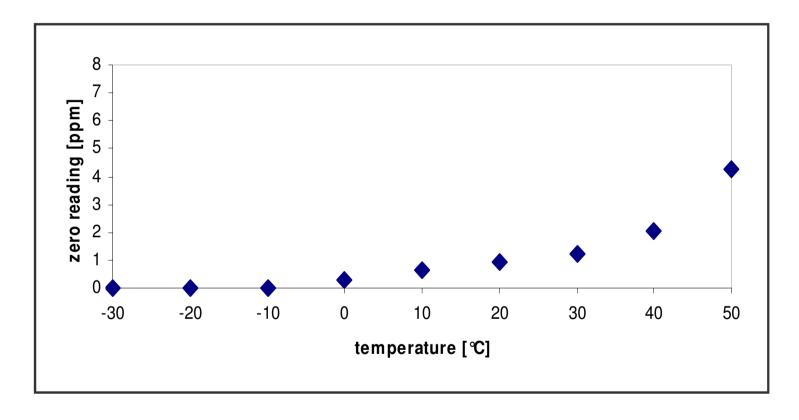

NH3 3E 1000 SE

CROSS SENSITIVITIES AT 20 ℃

| Gas | Concentration | Reading [ppm] |
|------------------|---------------|---------------|
| Alcohols | 1000 ppm | 0 |
| Carbon Monoxide | 100 ppm | 0 |
| Carbon Dioxide | 5000 ppm | 01 |
| Chlorine | 30 ppm | 5 |
| Nitric Oxide | 100 ppm | 0 |
| Nitrogen Dioxide | 10 ppm | 6.5 |
| Sulfur Dioxide | 200 ppm | -20 |
| Hydrogen | 3000 ppm | 0 |
| Hydrogen Sulfide | 200 ppm | 120 |

1) At higher carbon dioxide concentration (approx. >5%) there can be a negative reading

Notes:

- 1. Interference factors may differ from sensor to sensor and with life time. It is not adviseable to calibrate with interference gases.
- 2. This table does not claim to be complete. The sensor might also be sensitive to other gases.

Safety Note

This sensor is designed to be used in safety critical applications. To ensure that the sensor and/or instrument in which it is used, are operating properly, it is a requirement that the function of the device is confirmed by exposure to target gas (bump check) before each use of the sensor and/or instrument. Failure to carry out such tests may jeopardize the safety of people and property.

Attention

Use of this range, sensors requires complete understanding of the instructions.

Before using the range of sensors, please carefully read 'Application Notes'.

For further assistance on sensor selection and use, please contact a member of the Technical Sales team.